

KOMATSU®

HM400-2 With Tier 3 Engine

GROSS HORSEPOWER

338 kW 453 HP

NET HORSEPOWER

327 kW 438 HP

MAXIMUM GVW

69040 kg 152,200 lb

**HM
400**

ARTICULATED DUMP TRUCK



Photo may include optional equipment.

WALK-AROUND

The HM400-2 with the new EPA Tier 3 and EU Stage 3A emission certified “ecot3” engine offers all around maximum productivity with more horsepower and many features that enhance efficiency, while reducing maintenance costs. From rough terrain construction sites to landfills, the HM400-2 has the competitive advantage.

Wide, spacious cab with excellent visibility

- The wide cab offers a comfortable operator and passenger environment
- Viscous mounts support the cab while absorbing vibrations and noise
- Low-noise cab through improved sealing with integrated floor
Interior noise level **76 dB(A)**
- Additional front under view mirrors provide superior visibility
- Air suspension seat is standard
- Power windows
- Electric heated rear window

High performance and environment-friendly SAA6D140E-5 “ecot3” engine

- Gross horsepower 338 kW **453 HP**
- North American EPA Tier 3 and EU Stage 3A emission certified
- Engine power mode selection system realizes both greater productivity and improved fuel economy
- Higher engine output and torque improve productivity in all applications

Tiltable cab can be tilted rearward **32°** to provide easy service.

Fully hydraulic articulated steering

- Light and easy operation
- Minimum turning radius **8.7 m 28'7"**
- Tilt and telescoping steering column fits any operator



Hydro-pneumatic trailing arm suspension for all terrains

The hydro-pneumatic suspension in both front and rear suspensions assures a comfortable ride even over rough terrain and helps keep the tires on the ground at all times.



KOMTRAX equipped machines can send location, SMR and operation maps to a secure website utilizing wireless technology. Machines also relay error codes, cautions, maintenance items, fuel levels, and much more.

GROSS HORSEPOWER
338 kW **453 HP** @ 2000 rpm

NET HORSEPOWER
327 kW **438 HP** @ 2000 rpm

MAXIMUM GVW
69040 kg **152,200 lb**

Komatsu designed, electronically controlled transmission for a comfortable ride

F6-R2 counter-shaft type transmission with K-ATOMiCS (Komatsu Advanced Transmission with Optimum Modulation Control System). Transmission shift hold button optimizes the operator control or the transmission will automatically shift through all gears.

Easy-to-load body

- Heaped capacity 22.3 m³ **29.2 yd³**
- Low loading height 2970 mm **9'9"**
- High strength body constructed of thick wear-resistant steel



Photo may include optional equipment



Interaxle & differential locks provide excellent traction in rough terrain

The oil-cooled multiple-disc interaxle lock and differential locks can be turned on and off during travel. In addition, the differential locks can lock up all three axle's differentials 100% for maximum traction.

High capacity, reliable, continuously cooled, wet type multiple-disc brake and retarder combination

- Fully hydraulic controlled wet multiple-disc service brakes
- Retarder Absorbing Capacity (continuous descent) 472 kW **633 HP**

PRODUCTIVITY FEATURES

The combination of high horsepower and an efficient engine with low emissions delivers maximum productivity at the lowest cost.



Komatsu's new "ecot3" engines are designed to deliver optimum performance under the toughest of conditions, while meeting the latest environmental regulations. This engine is Tier 3 EPA, EU Stage 3A and Japan emissions certified. "ecot3" - ecology and economy combined with Komatsu technology to create a high performance engine without sacrificing power or productivity.

High-Performance Komatsu SAA6D140E-5 Engine

The Komatsu engine delivers faster acceleration and higher travel speeds with high horsepower per ton. Advanced technology, such as Common Rail Injection system (CRI), air-to-air aftercooler, and an efficient turbo-charger enables the engine to be North American EPA Tier 3 and EU stage 3A emission certified. High torque at low speed, impressive acceleration, and low fuel consumption ensure maximum productivity.

Engine Power Mode Selection System

The system allows selection of the appropriate mode between two modes <Power mode> or <Economy mode> according to each working condition. The mode is easily selected with a switch in the operator's cab.

Power mode

Great productivity can be attained by taking full advantage of high output power. It is appropriate for job sites where the truck meets high resistance.

Economy mode



Engine speeds for the maximum horsepower output and the downshift and upshift speeds are set to a lower level. It is appropriate for light work on the flat ground.

Komatsu-Designed Electronically Controlled Countershaft Transmission

The Komatsu designed Electronically Controlled Transmission with K-ATOMiCS has been a success in Komatsu's rigid dump trucks. The electronic clutch modulation system ensures proper clutch pressure when the clutch is engaged. The total control system controls both the engine and transmission by monitoring the vehicle conditions. This high technology system assures smooth shifts without shock and maximizes power train life.


Komatsu-Designed Interaxle and Differential Locking Systems

The full-time six-wheel drive system reduces slippage. A wet multiple-disk interaxle clutch also locks the three axles in unison for greater traction. The interaxle lock and differential locks can be switched on and off while the truck is travelling, thereby boosting productivity. In addition, the differential lock switch, which is a three position switch, can lock up the rear axle differentials only, or all axles for maximum performance in the worst conditions.

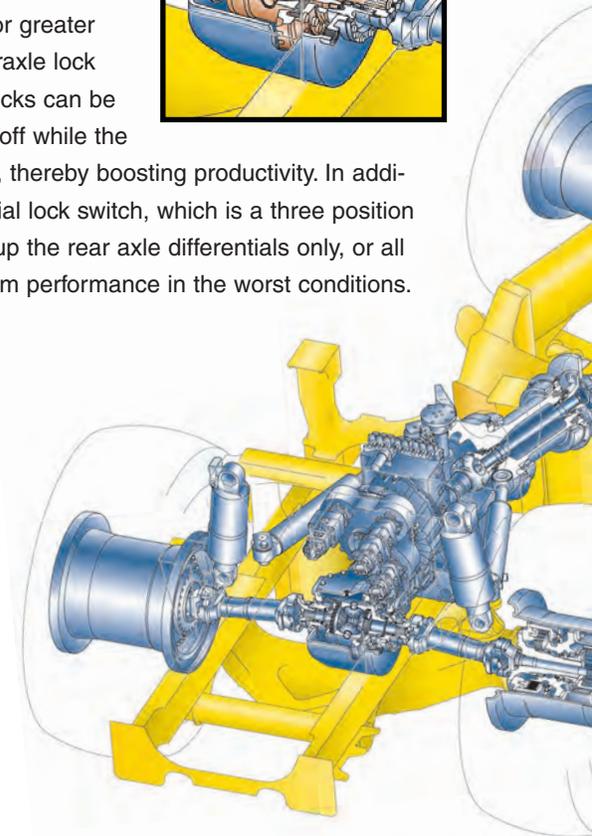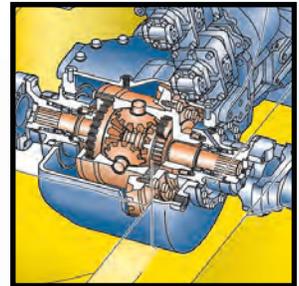


Hydro-Pneumatic Trailing Arm Suspension

The hydro-pneumatic suspension has been proven on Komatsu's rigid dump trucks. The front axle hydro-pneumatic suspension is a trailing arm design which allows the truck to ride smoothly. The rear-axles are mounted on a dynamic equalizer structure equipped with hydro-pneumatic suspension. The entire vehicle's hydro-pneumatic suspension delivers a comfortable ride and maximizes productivity.

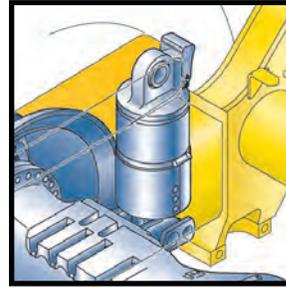

Large Capacity Body and Box Section Frame Structure

The 22.3 m³ **29.2yd³** heaped capacity body is among the highest capacity in its class. The low loading height of 2970 mm **9'9"** enables easy loading. The body is built of high strength wear-resistant steel and the body shape provides excellent load stability and retains the load. Rugged enough for the toughest jobs, the HM400's frame is designed using a rigid box structure with connecting torque tubes made of high strength low alloy steel.

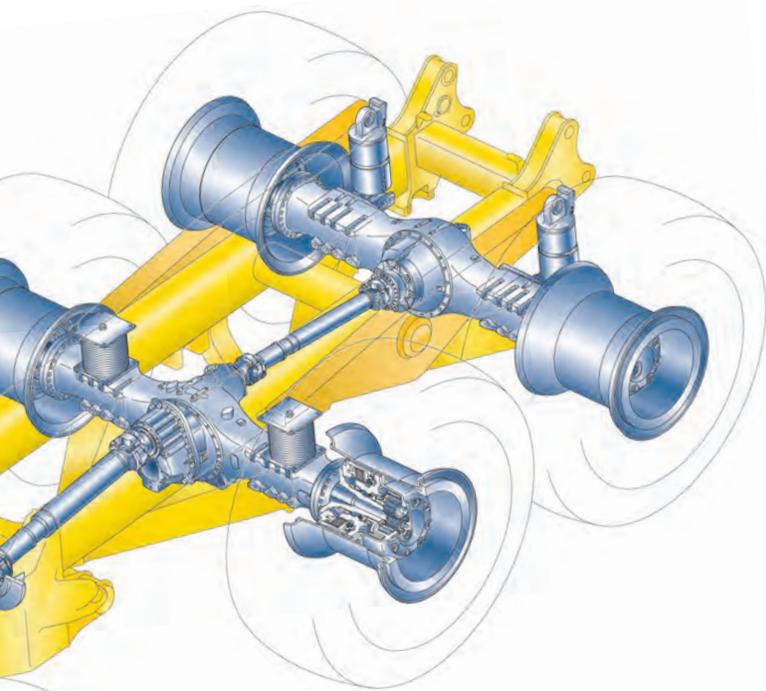

Hydraulically Controlled Wet Multiple-Disc Brakes and Retarder


Wet multiple-disc brakes have been proven on Komatsu dump trucks and wheel loaders ensuring highly reliable and stable brake performance. The large-capacity, continuously cooled, wet-multiple disc brakes also function as a highly responsive retarder which gives the operator greater confidence at higher speeds when travelling downhill.

Retarder Absorbing Capacity (continuous descent):

472 kW 633 HP

Articulated Steering

Fully hydraulic articulated steering offers low-effort operating performance and maneuverability. A minimum turning radius of only 8.7 m **28'7"** provides ability to work in tight areas.

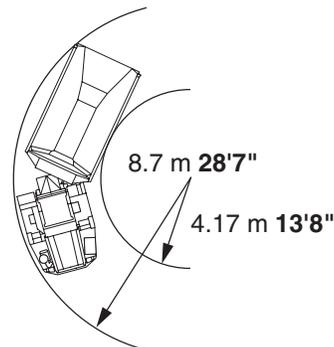

EASY MAINTENANCE

The Komatsu cab is a state-of-the-art, wide comfortable cab with a low level of vibration and noise, plus excellent visibility.

Low-noise Designed Cab

Integrated cab and floor provide an airtight cab. Engine compartment is also sealed. The low noise and sound insulated muffler/exhaust pipe contribute to reducing sound levels. The combined features offer a quiet and comfortable operator environment.

Wide, Spacious Cab with Excellent Visibility

The wide cab provides a comfortable space for the operator and a full size buddy seat. Large electrically operated windows and the operator's seat positioned to the left side ensures superior visibility.

Ergonomically Designed Cab

The ergonomically designed operator's compartment makes it very easy and comfortable for the operator to use all the controls. The result is more comfortable operation for greater productivity.

The front under view mirrors are increased to three from one, and the rear view mirrors increased to four from two.

Electric heated rear window facilitates defrosting.



Easy-to-See Instrument Panel

The instrument panel makes it easy to monitor critical machine functions. In addition, a caution light warns the operator of any problems that may occur. This Komatsu on-board monitoring system makes the machine very friendly and easy to service.

Steering Wheel and Pedals

Low effort pedals reduce operator fatigue when working continuously for long periods. The tiltable, telescoping steering column enables operators to maintain the optimum driving position at all times.




Built-In ROPS/FOPS Level 2

Hydro-Pneumatic Suspension for All Terrains

The hydro-pneumatic suspension, for both front and rear axles, assures a comfortable ride even over rough terrain and ensures maximum productivity and operator confidence.

Viscous Cab Mounts

Viscous mounts reduce the noise transmitted to the cab and achieve a quiet 76 dB(A) noise level.

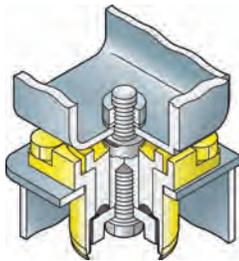

Air Suspension Seat Is Standard

The air suspension, fabric-covered seat which is adjustable to the operator's weight is provided as standard. The air suspension seat dampens vibrations transmitted from the truck and reduces operator fatigue as well as holding the operator securely to assure confident operation.

Electric Body Dump Control Lever

The low effort lever makes dumping easier than ever.

Supplementary Steering and Secondary Brakes

Supplementary steering and secondary brakes are standard features.



MAINTENANCE FEATURES

The HM400-2 has been designed to keep service time down and productivity up with a reduced number of grease points, easy access to filters, and longer intervals between oil changes.

Tiltable Cab

The cab can be tilted rearward 32° to provide easy maintenance/service for the engine and transmission.

Note: An external hydraulic pump is required to tilt the cab or a service crane can be used after easily removing only eight bolts. The hydraulic cylinder to tilt the cab is standard.

Fewer Grease Points

The number of grease points are minimized by using maintenance-free rubber bushings.

Extended Service Intervals

In order to minimize operating costs, service intervals have been extended:

- Engine oil 500 hours
- Transmission oil 1000 hours
- Engine oil filter 500 hours
- Transmission oil filters 1000 hours

Guards

The following guards are provided as standard:

- Protective grille for rear window
- Engine underguard
- Heavy duty transmission underguard
- Propeller shaft guards
- Exhaust thermal guard
- Front and rear tire mud guards



SPECIFICATIONS



ENGINE

Model Komatsu SAA6D140E-5
 Type Water-cooled, 4-cycle
 Aspiration Turbo-charged, after-cooled, cooled EGR
 Number of cylinders 6
 Bore 140 mm **5.51"**
 Stroke 165 mm **6.50"**
 Piston displacement 15.2 ltr **928 in³**
 Horsepower
 SAE J1995 Gross 338 kW **453 HP**
 ISO 9249 / SAE J1349 Net 327 kW **438 HP**
 Rated rpm 2000 rpm
 Fan drive type Mechanical
 Maximum torque 213 kg•m **1,541 lb. ft**
 Fuel system Direct injection
 Governor Electronically controlled
 Lubrication system
 Method Gear pump, force-lubrication
 Filter Full-flow type
 Air cleaner Dry type with double elements and
 precleaner, plus dust indicator

EPA Tier 3 certified



TRANSMISSION

Torque converter 3-elements, 1-stage, 2-phase
 Transmission Full-automatic, counter-shaft type
 Speed range 6 speeds forward and 2 reverse
 Lockup clutch Wet, single-disk clutch
 Forward Torque converter drive in 1st gear,
 direct drive in 1st lockup and all higher gears
 Reverse Torque converter drive and direct drive in all gear
 Shift control Electronic shift control with automatic
 clutch modulation in all gear
 Maximum travel speed 58.5 km/h **36.4 mph**



AXLES

Full time all wheel drive with 100% differential lock in all axles.
 Final drive type Planetary gear
 Ratios:
 Differential 3.417
 Planetary 4.941



SUSPENSION SYSTEM

Front Hydro-pneumatic suspension
 Rear Combined hydro-pneumatic
 and rubber suspension system



STEERING SYSTEM

Type Articulated type, fully hydraulic power steering
 with two double-acting cylinders
 Supplementary steering Automatically actuated,
 electrically powered
 Minimum turning radius, wall to wall 8.7 m **28'7"**
 Articulation angle 45° each direction



BRAKES

Service brakes Full-hydraulic control, oil-cooled
 multiple-disc type on all wheels
 Parking brake Spring applied, caliper disc type
 Retarder Front and center axle brakes act as retarder



MAIN FRAME

Type Articulated type, box-sectioned
 construction on front and rear
 Connected by strong torque tubes.



BODY

Capacity:
 Struck 16.5 m³ **21.6 yd³**
 Heaped (2:1, SAE) 22.3 m³ **29.2 yd³**
 Payload 36.5 metric tons **40 U.S. tons**
 Material 130 kg/mm² **185,000 psi**
 high tensile strength steel
 Material thickness:
 Bottom 16 mm **0.63"**
 Front 8 mm **0.31"**
 Sides 12 mm **0.47"**
 Target area
 (inside length x width) 5629 mm x 3194 mm **18'6" x 10'6"**
 Heating Exhaust heating (option)



HYDRAULIC SYSTEM

Hoist cylinder Twin, 2-stage telescopic type
 Relief pressure 20.6 Mpa **210 kg/cm² 2,990 psi**
 Hoist time 12 sec



CAB

Dimensions comply with ISO 3471 and SAE J1040-1988c ROPS
 (Roll-Over Protective Structure) standards



WEIGHT (APPROXIMATE)

Empty weight 32,460 kg **71,560 lb**
 Gross vehicle weight 69,040 kg **152,200 lb**
 Weight distribution:
 Empty: Front axle 55.1%
 Center axle 22.8%
 Rear axles 22.1%
 Loaded: Front axle 29.0%
 Center axle 35.7%
 Rear axles 35.3%



TIRES

Standard tire 29.5 R25




SERVICE REFILL CAPACITIES

Fuel tank 493 ltr. **130.8 U.S. Gal**
 Engine oil 50 ltr. **13.2 U.S. Gal**
 Torque converter, transmission and
 retarder cooling 115 ltr. **30.4 U.S. Gal**
 Differentials (total) 97 ltr. **25.6 U.S. Gal**
 Final drives (total) 33 ltr. **8.7 U.S. Gal**
 Hydraulic system 180 ltr. **47.6 U.S. Gal**
 Suspension (total) 20.4 ltr. **5.4 U.S. Gal**


HM400-2 ARTICULATED DUMP TRUCK




DIMENSIONS

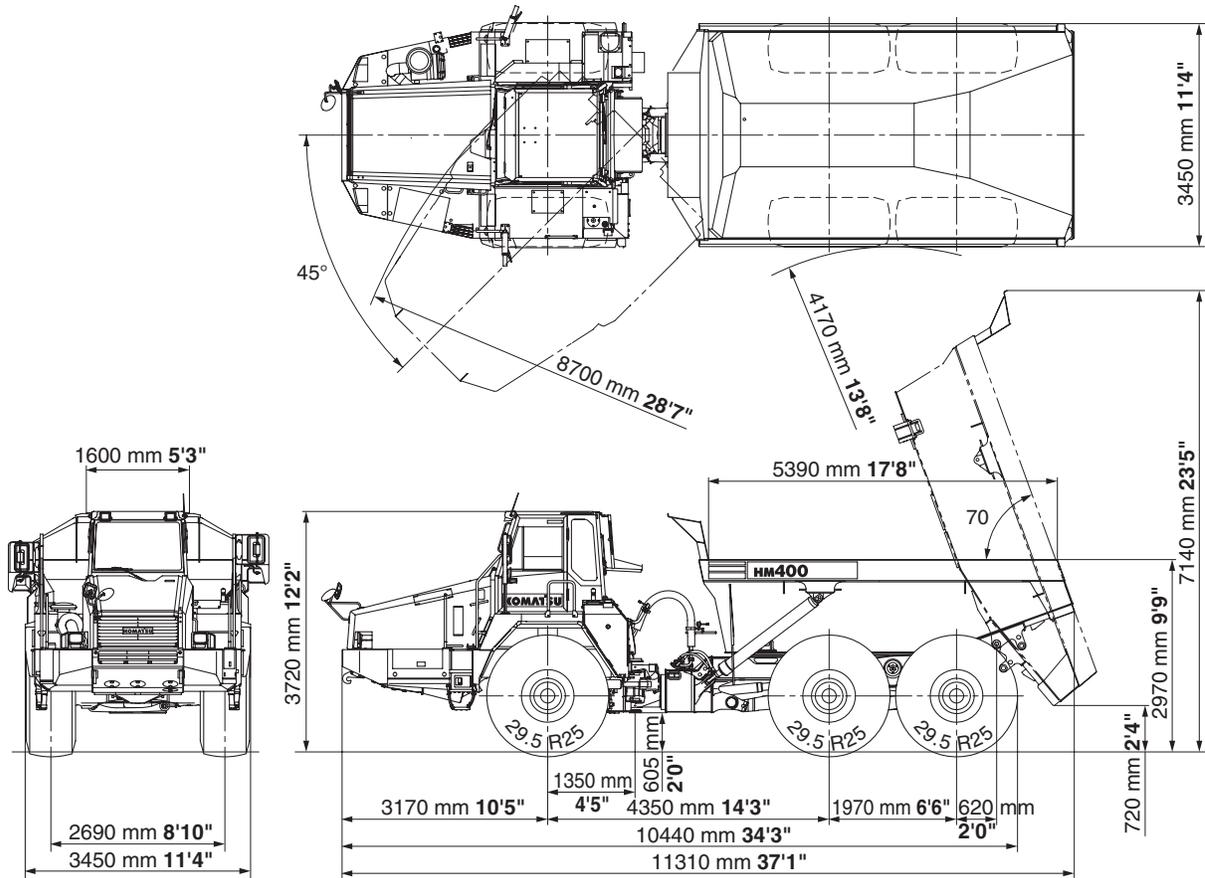

TRAVEL PERFORMANCE

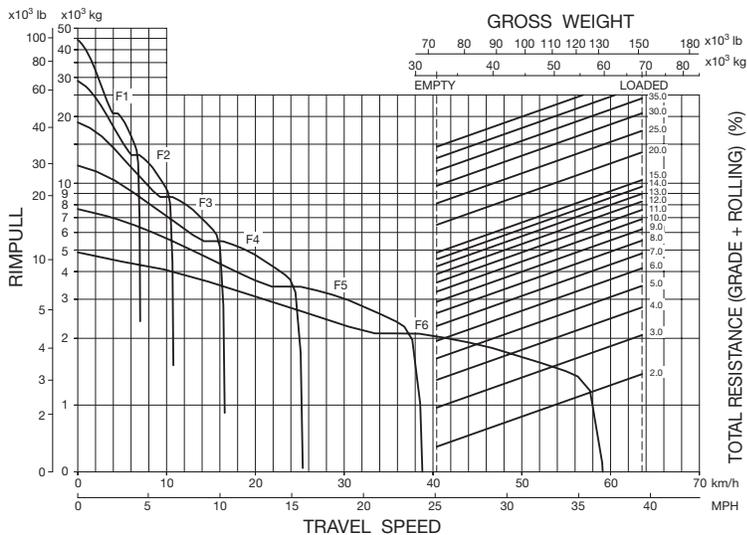

BRAKE PERFORMANCE

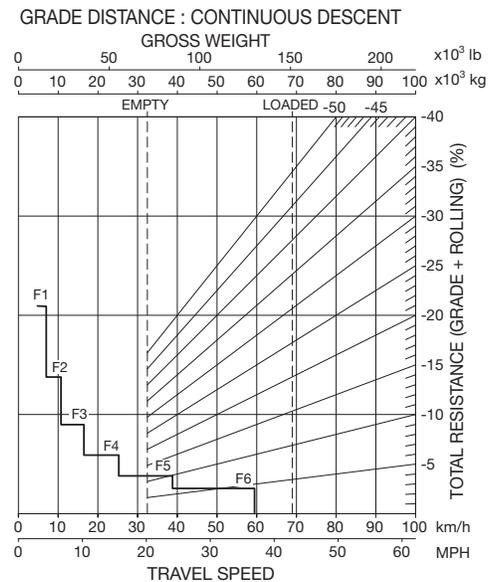



AESS703-03

©2009 Komatsu America Corp.

Printed in USA

K04(1.5M)C

4/09(EV-1)

KOMATSU[®]



www.KomatsuAmerica.com



Komatsu America Corp. is an authorized licensee of Komatsu Ltd. Materials and specifications are subject to change without notice. **KOMATSU** is a trademark of Komatsu Ltd., Japan. **KOMTRAX**[®] is a trademark of Komatsu America Corp.